


WBM TRIPLE LOCK PIN-GRABBER COUPLER



WBM Triple Lock 'Pin-Grabber' Couplers incorporate enhanced safety features for fast attachment change-out from the comfort and safety of your machine.

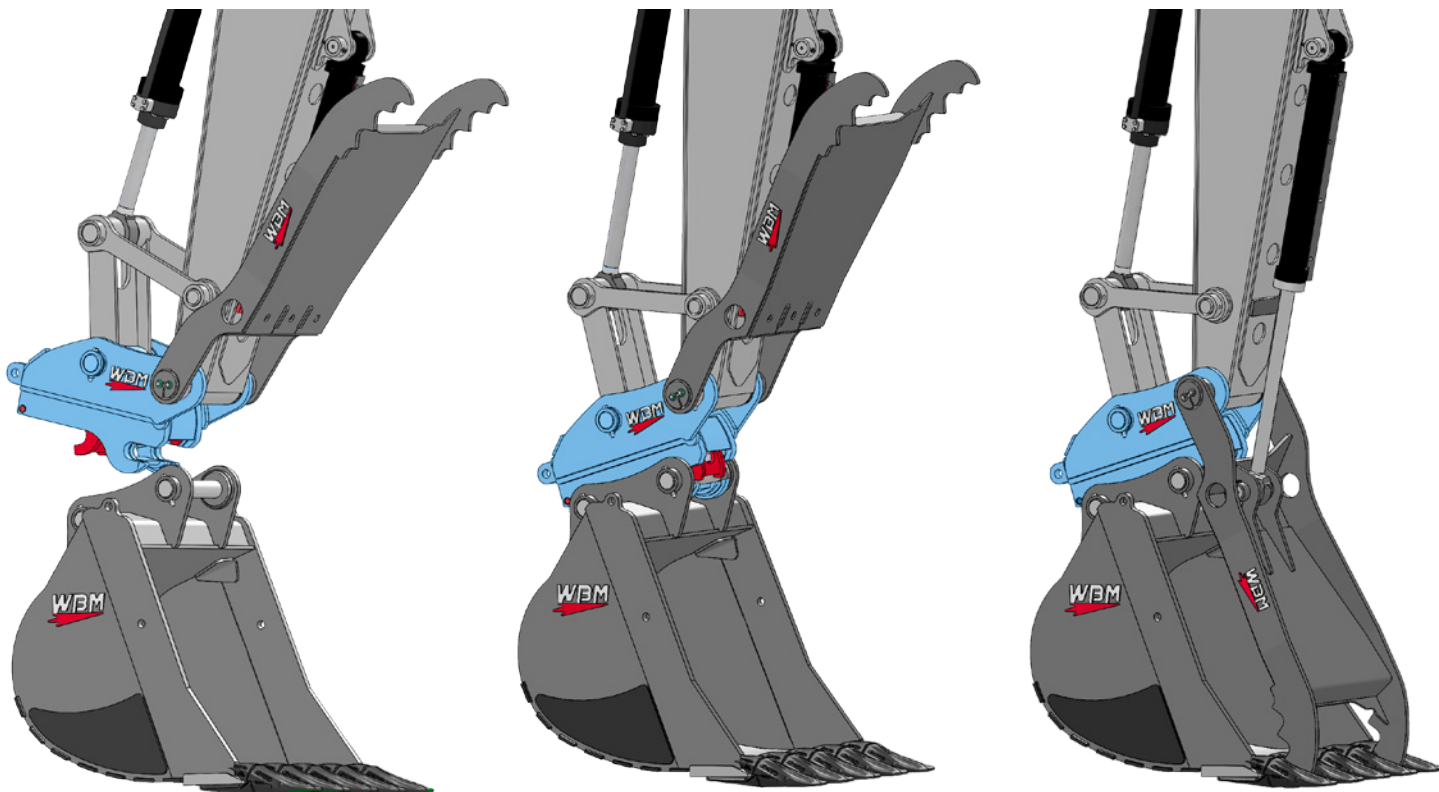

FEATURES & BENEFITS


- Designed and developed by Oriel, the Triple Lock PG Coupler is manufactured to all relevant safety standards worldwide
 - EN 474-1; 2007+A3; 2013 compliant
 - EN ISO 4413; 2010
 - 2006/42/EC Machine Directive
- Minimizes potential safety issues and machine downtime as the operator remains in the cab to complete attachment changes
- Manufactured with high strength steels for superior quality and wear performance
- Wear indicators indicate when maintenance is required
- Durability and reliability are guaranteed as a result of extensive testing and quality control procedures
- Designed to give the operator clear visibility and reassurance when attachments are in the locked position
- Fully automated locking system – no manual intervention required to secure or release attachments
- Heavy duty "certified" lift eye for additional functionality
- Can pick up attachments in reverse (shovel configuration)
- Each coupler is supplied with a full installation kit and one set of attachment pins

Designed to fit excavators from 15 to 30T, and work with all WBM PG thumbs, buckets and attachments. **(Other sizes available in the near future)*

Continued on next page »


'TRIPLE LOCK' COUPLER FEATURES

- 1 **Front Lock** - Hooks to front pin
- 2 **Rear Lock** - Extends to engage on rear pin
- 3 **Dead Lock** - Activated when the cylinder extends into its final position and locks the front lock in position

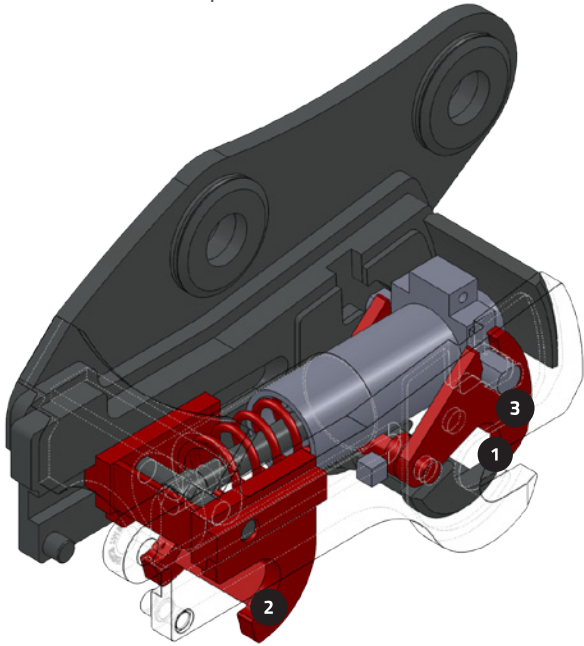

SAFETY FEATURES

- Pilot operated check valve ensures cylinder can only be operated when hydraulic pressure is available
- Integrate pressure sensing system on the bucket curl circuit ensures that the attachment can only be released with positive hydraulic pressure
- The spring ensures that even in the event of complete hydraulic failure the front latch cannot release

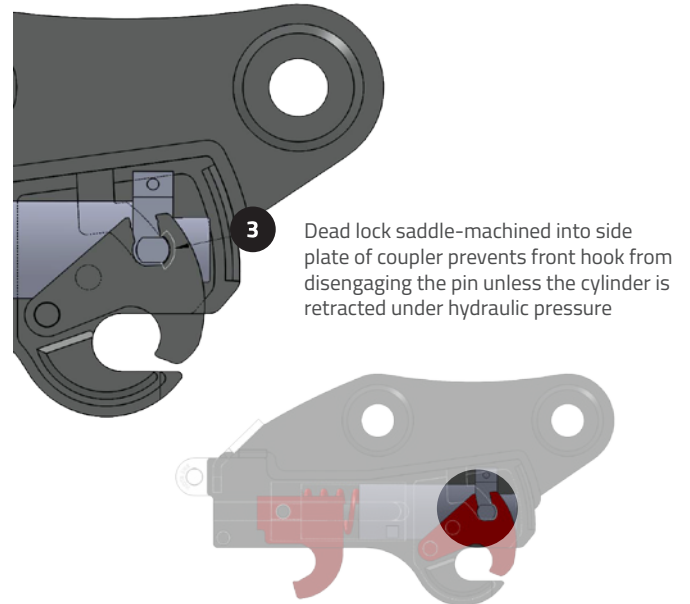

MACHINE CLASS	CLASS RANGE (tonnes)	WBM QUICK COUPLER MODEL	PIN DIAMETER (mm)	PIN CENTERS MIN-MAX (mm)	COUPLER WIDTH (mm)	WEIGHT KG (LB)
Class 80	6-9	EX80-PGC-2P-50	50	275-370	180	92 (202)
Class 120	10-15	EX120-PGC-2P-60	60	355-460	250	210 (462)
		EX120-PGC-2P-65	65	355-460	250	210 (462)
Class 150	15-19	EX150-PGC-2P-70	70	380-480	280	260 (573)
		EX150-PGC-2P-80	80	385-480	300	345 (760)
Class 200	20-25	EX200-PGC-2P-80	80	385-530	300	400 (882)
Class 250	24-35	EX250-PGC-2P-80	80	385-530	300	420 (925)
		EX250-PGC-2P-90	90	475-565	325	440 (970)
Class 300	30-40	EX300-PGC-2P-90	90	475-565	325	460 (1,014)
		EX300-PGC-2P-100	100	500-600	325	640 (1,410)
Class 400	40-50	EX400-PGC-2P-100	100	500-640	370	740 (1,631)
		EX400-PGC-2P-110	110	535-645	390	740 (1,631)

WBM PIN GRABBER COUPLERS POWERED BY ORIEL ATTACHMENTS

